



A 349

Cilindri	Cylinders	N°	1
Alesaggio	Bore	mm	82
Corsa	Stroke	mm	66
Cilindrata	Displacement	cm³	349
Rapporto di compress.	Compression ratio	-	7,4:1
Giri/min	RPM	-	3000 3600 4000
Potenza	Rating	N (80/1269/CEE) (ISO 1585)	kW/CV 5,5 / 7,5 5,9 / 8 6 / 8,2
Potenza	Rating	NA (ISO 3046/1 ICXN)	kW/CV 4,7 / 6,4 5,1 / 6,9 -
Coppia max.	Max. torque	Nm - kgm	18,6 - 1,9
Cons.spec.min.	Min. specific fuel consumpt.	g/kWh - g/HPh	392 - 288
Capacità serbatoio	Fuel tank capacity	l	5,2
Capacità carter olio	Oil sump capacity	l	0,6
Peso a secco	Dry weight	kg	23

A 360

Cilindri	Cylinders	N°	1
Alesaggio	Bore	mm	82
Corsa	Stroke	mm	66
Cilindrata	Displacement	cm³	349
Rapporto di compress.	Compression ratio	-	7,4:1
Giri/min	RPM	-	3000 3600 4000
Potenza	Rating	N (80/1269/CEE) (ISO 1585)	kW/CV 5,9 / 8 6,5 / 8,8 6,7 / 9,1
Potenza	Rating	NA (ISO 3046/1 ICXN)	kW/CV 5 / 6,8 5,6 / 7,6 -
Coppia max.	Max. torque	Nm - kgm	19,1 - 1,95
Cons.spec.min.	Min. specific fuel consumpt.	g/kWh - g/HPh	392 - 288
Capacità serbatoio	Fuel tank capacity	l	5,2
Capacità carter olio	Oil sump capacity	l	0,6
Peso a secco	Dry weight	kg	23




A 349
A 360


1560271 SHORT BLOCK




RICAMBI - SPARE PARTS - ERSATZTEILE - PIECES DETACHEES - REPUESTOS

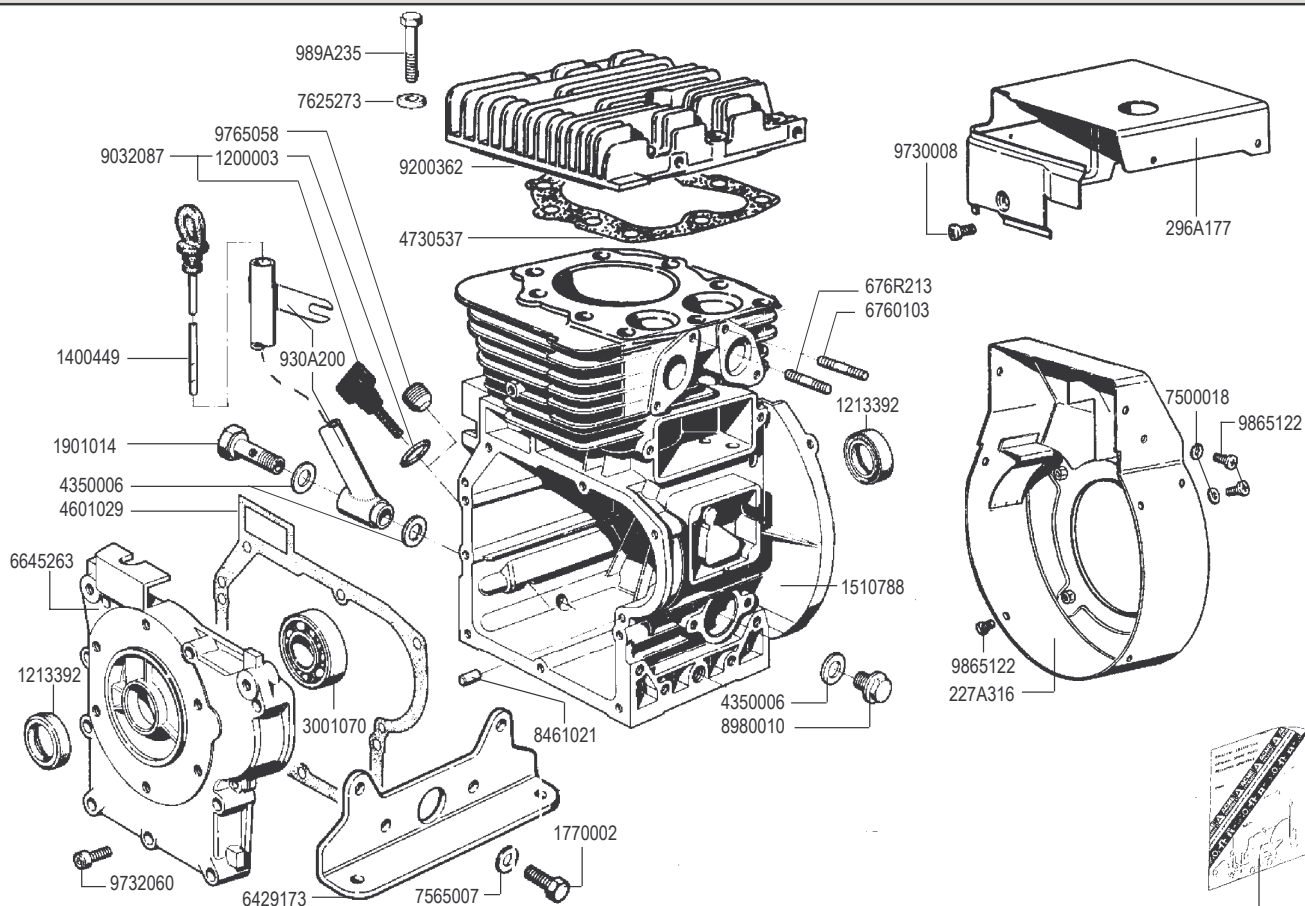


-B2A017

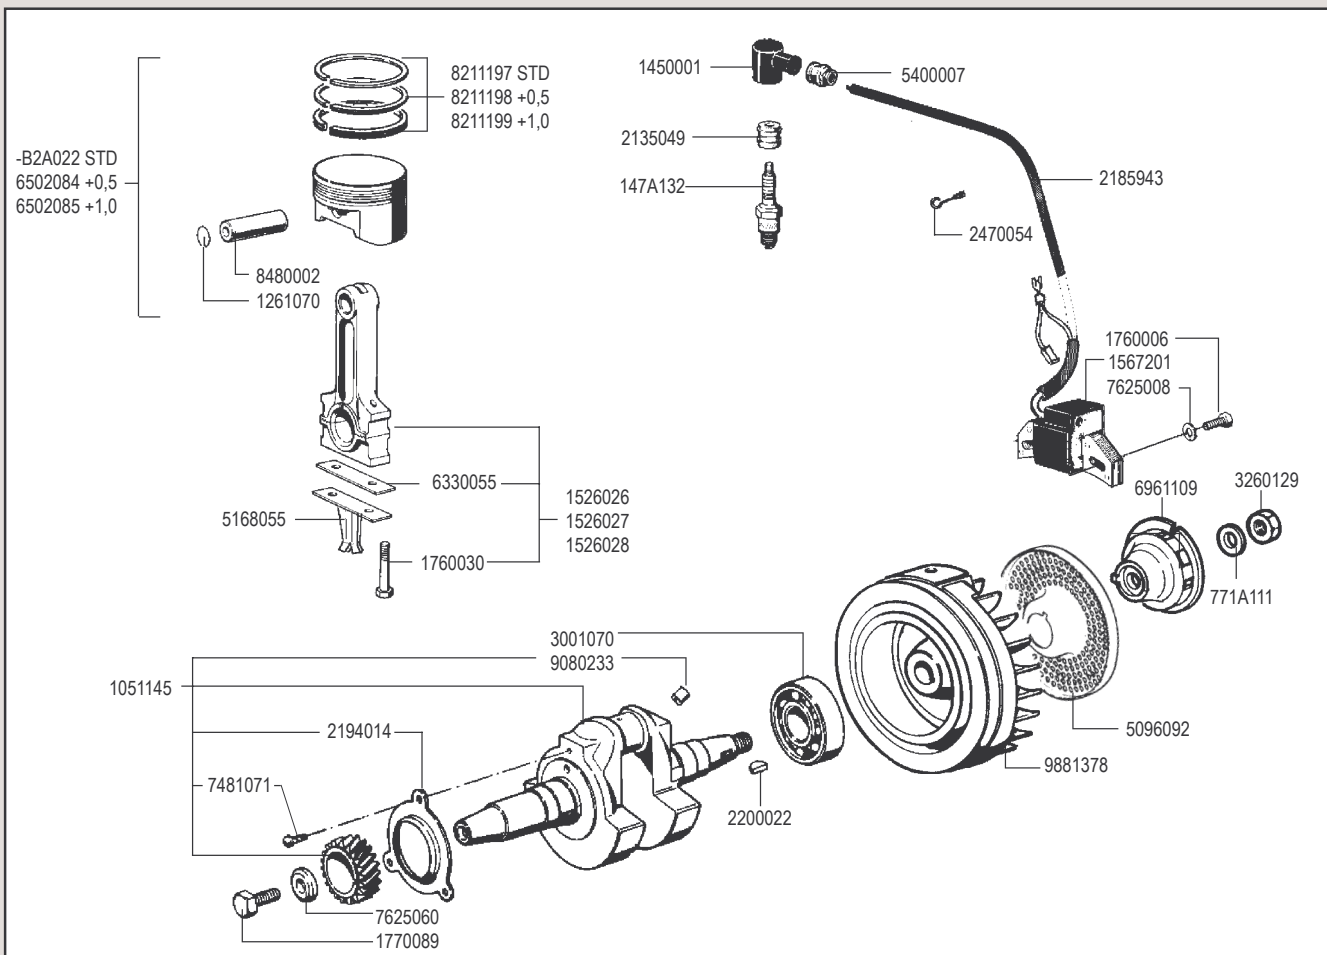



RICAMBI - SPARE PARTS - ERSATZTEILE - PIECES DETACHEES - REPUESTOS

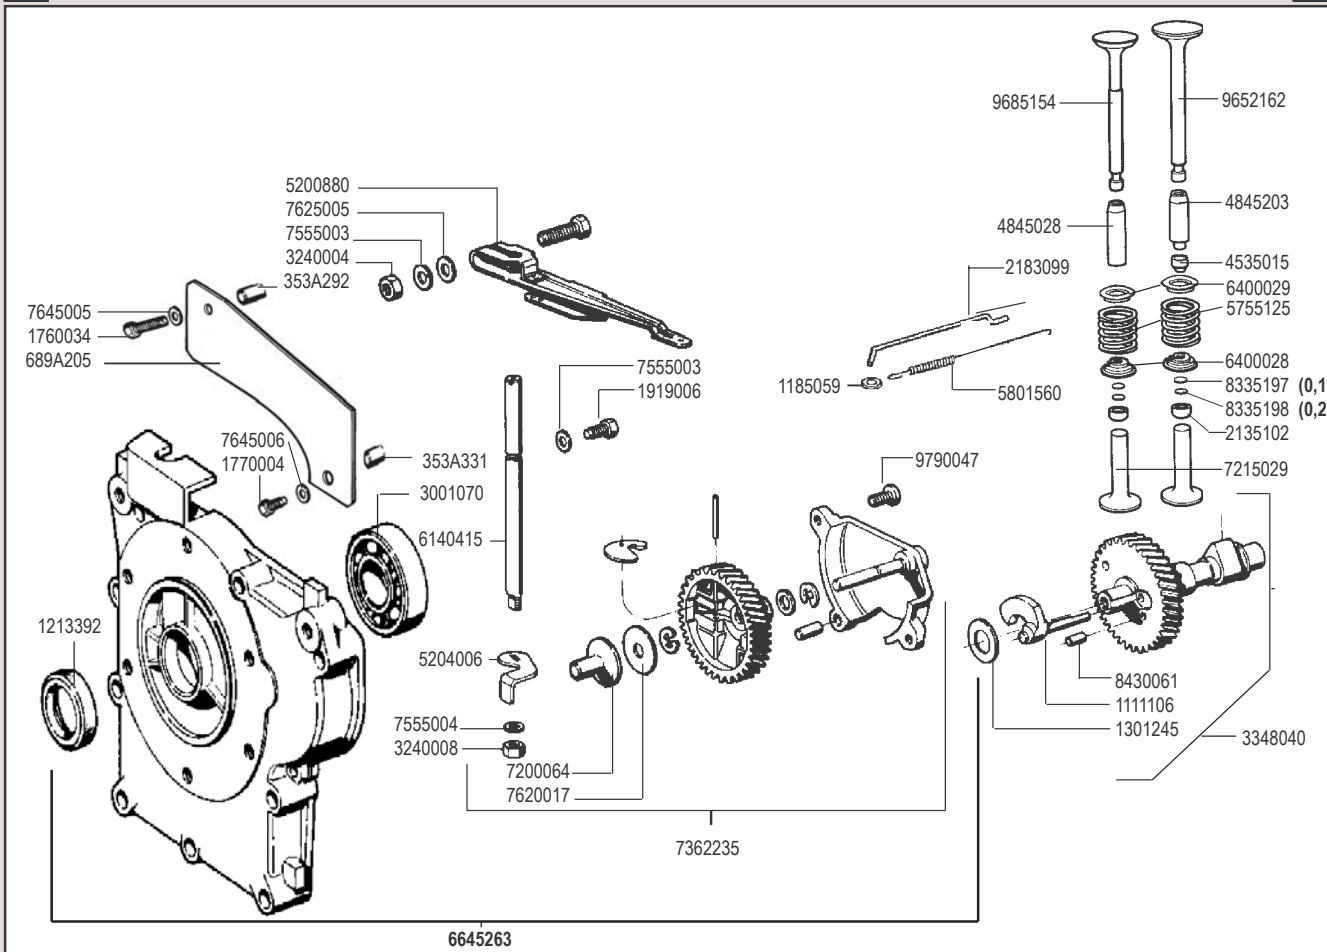

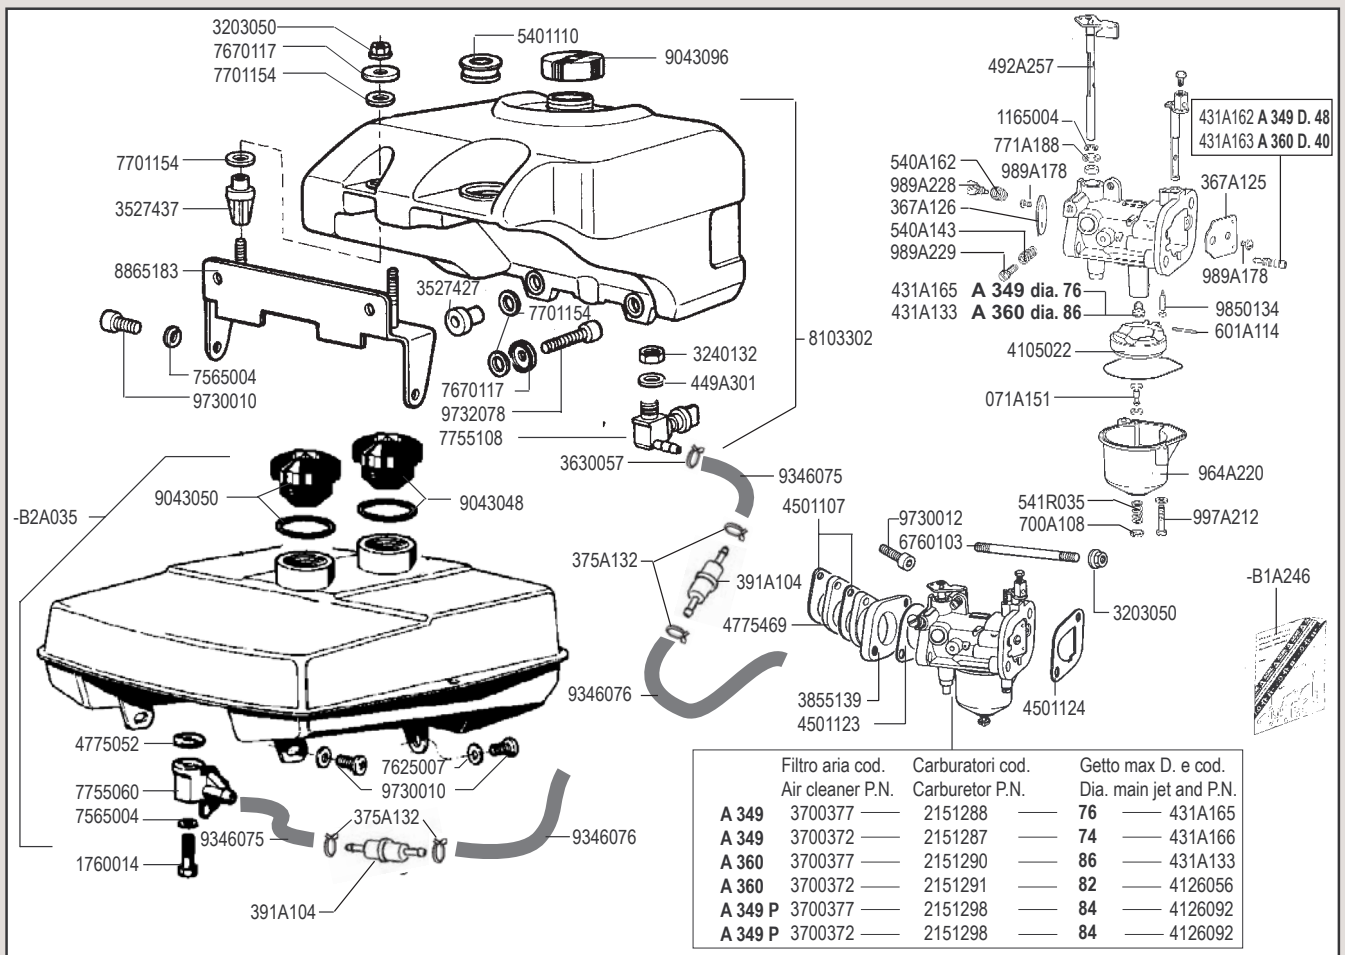



RICAMBI - SPARE PARTS - ERSATZTEILE - PIECES DETACHEES - REPUESTOS

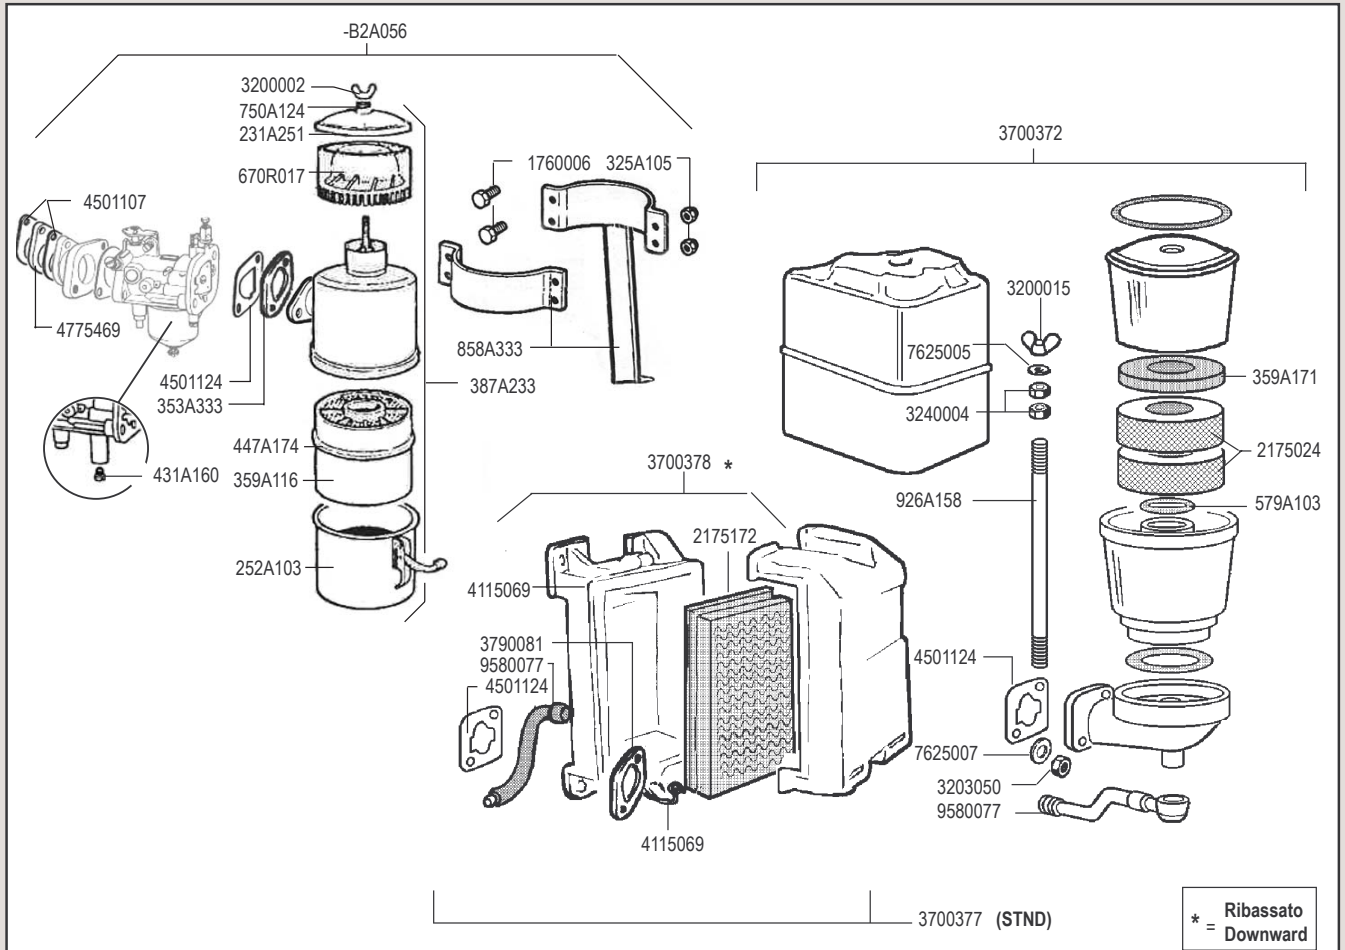

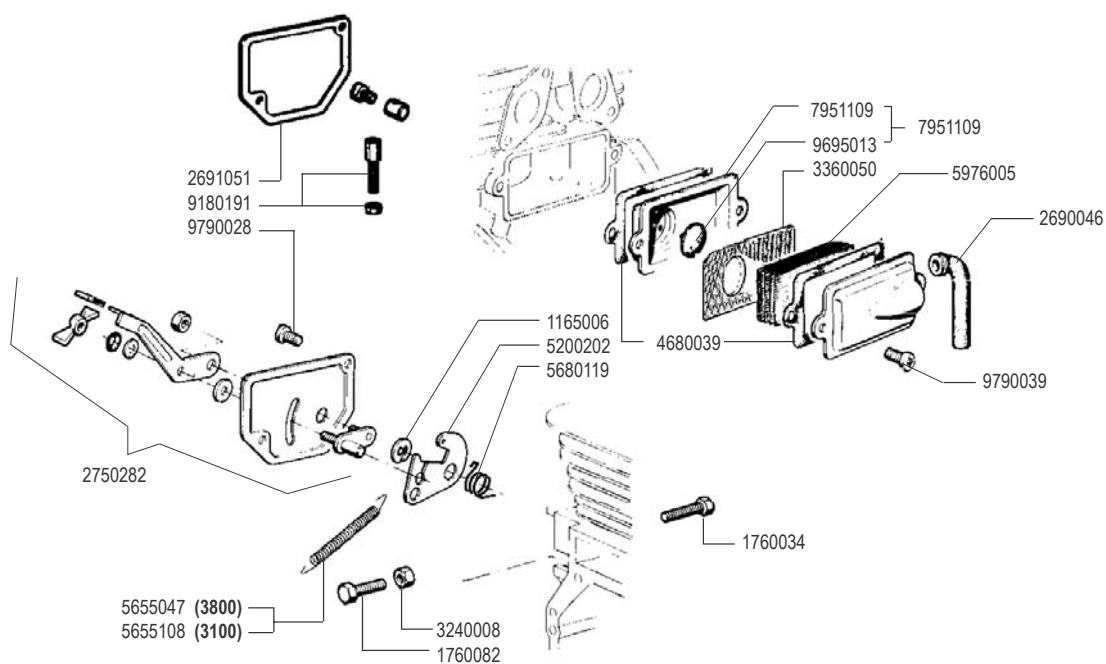



RICAMBI - SPARE PARTS - ERSATZTEILE - PIECES DETACHEES - REPUESTOS

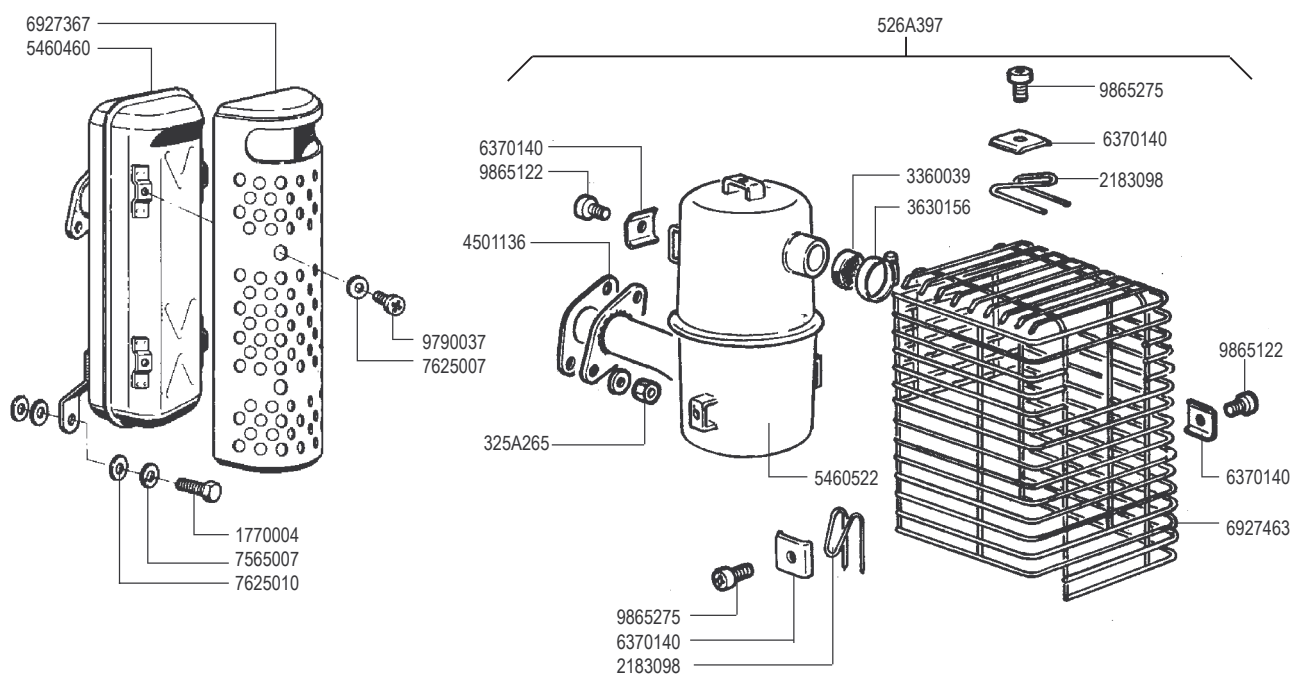

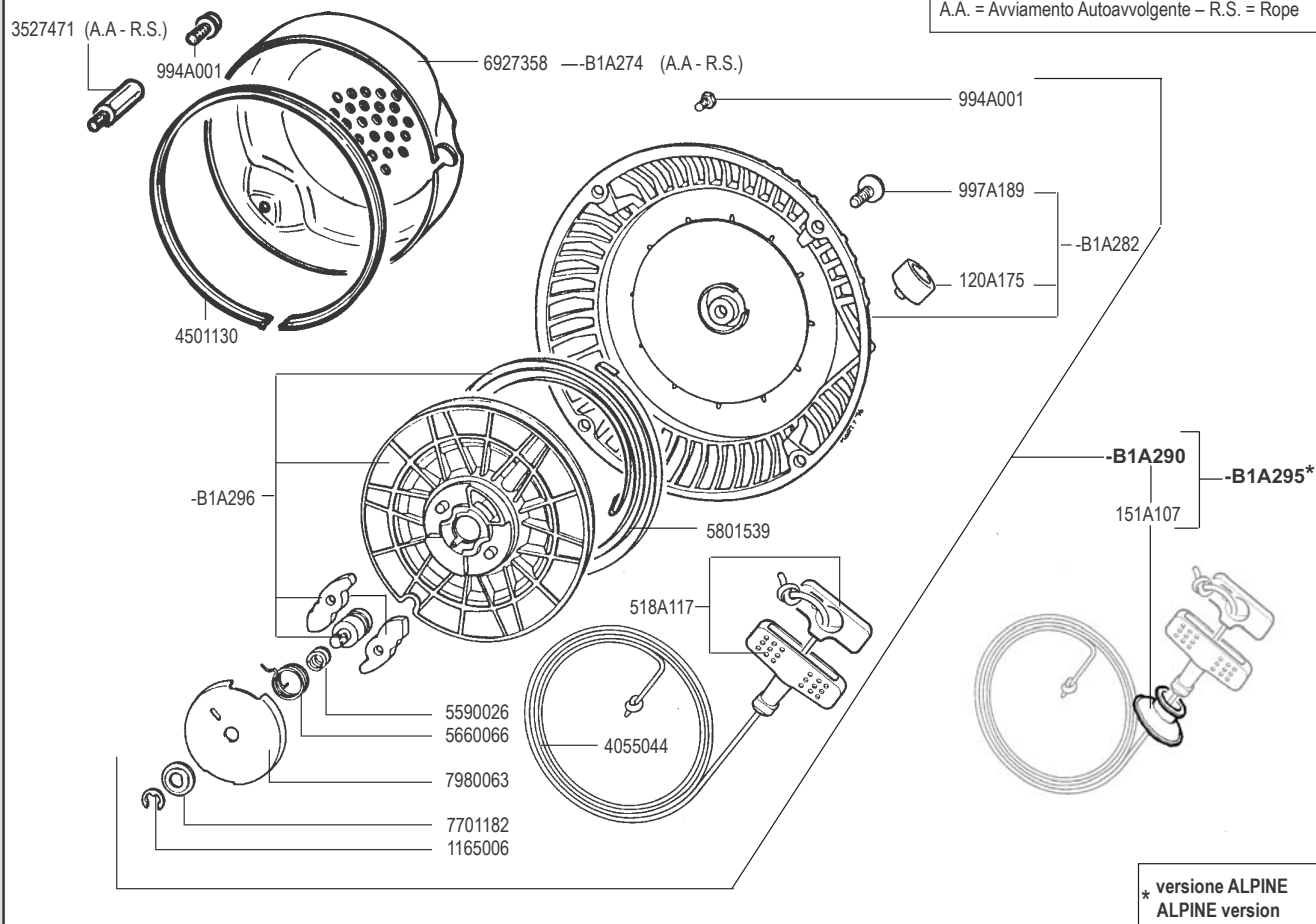

RICAMBI - SPARE PARTS - ERSATZTEILE - PIECES DETACHEES - REPUESTOS

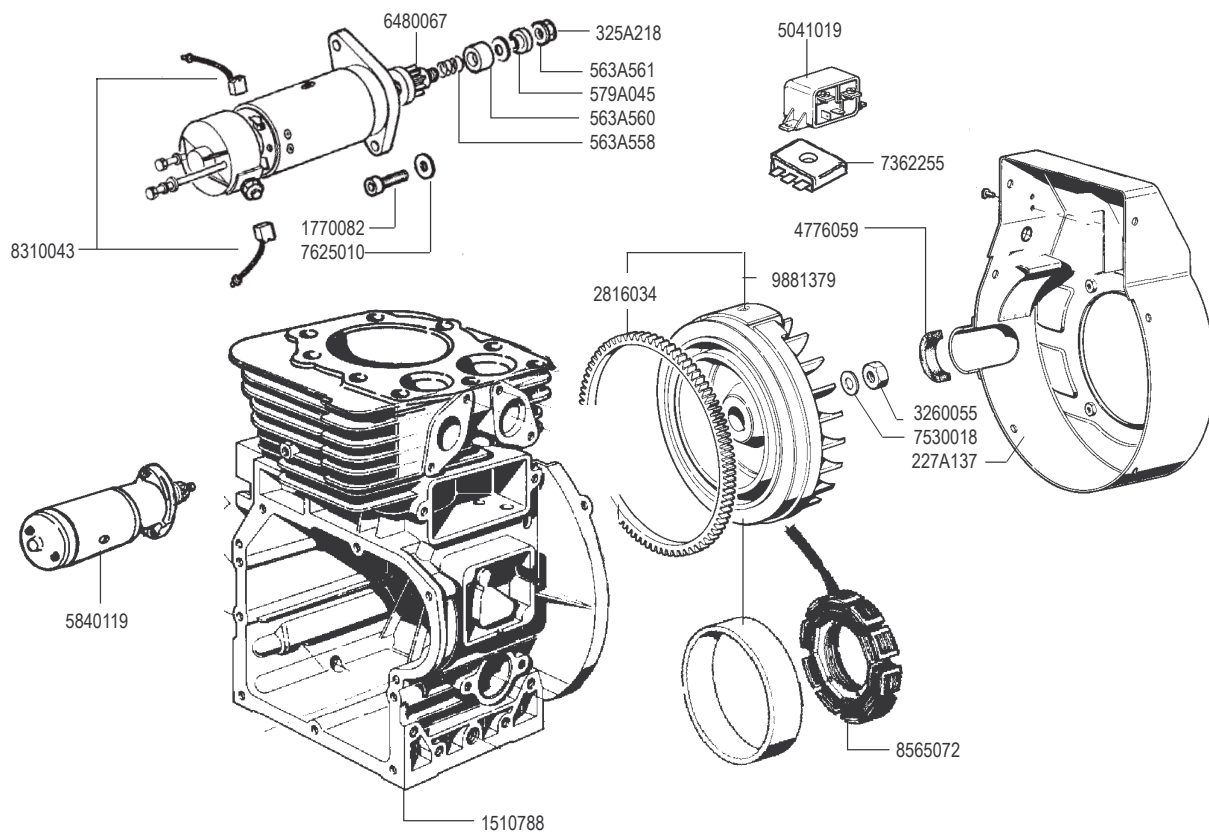

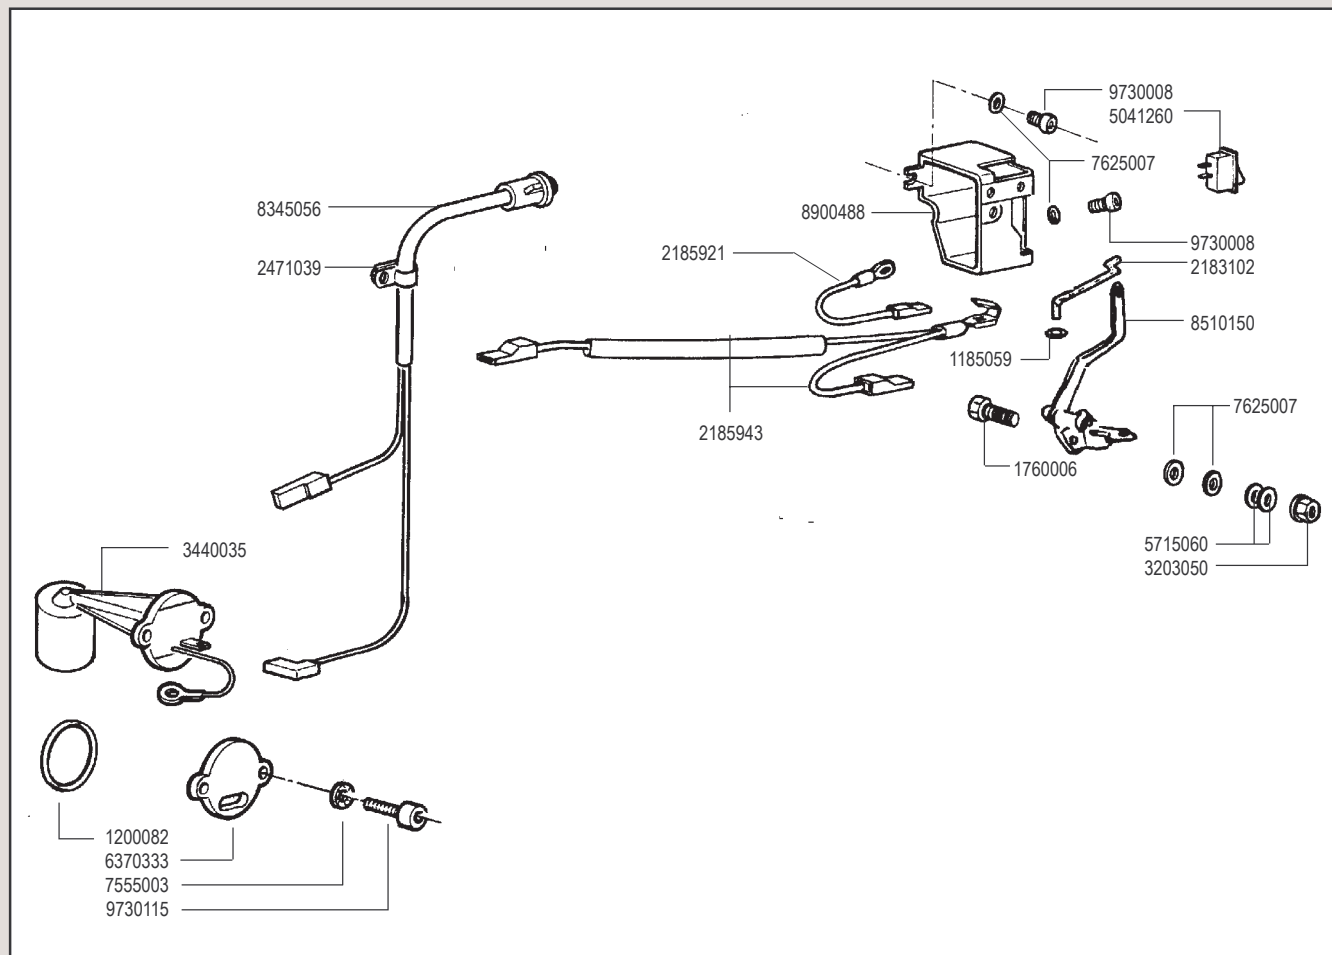

RICAMBI - SPARE PARTS - ERSATZTEILE - PIECES DETACHEES - REPUESTOS

