


INVERTER POWER GENERATOR 3500 W

- Peak power of 3500 W, maximum power of 3200 W for devices with sensitive electronics, power tools, etc.
- Equipped with two 230 V~ AC sockets and two 2.1 A USB ports (quick charging), 1 x 12 V power outlet
- Displacement of 141 cm³, air cooled 4 stroke petrol engine with pull cable starter
- Compact design in carrying case size made of impact-resistant plastic with handle
- Automatic shutdown in case of oil shortage
- A fuel tank of 6.3 L and an engine oil capacity of 400 ml
- Clean sine wave for sensitive devices such as laptops, televisions, tablets or smartphones
- Low noise level of 66 dB*

*Noise levels may vary depending on distance and location and were measured at 25% load and at a distance of 7 metres from the control panel.



OPTIONAL ACCESSORIES

ENGINE OIL
ULTRA
PERFORMANCE
LONGLIFE SAE
5W-40
500 ml

Article number: 3906100701
Barcode: 4014915073512

Transport handle (standard)



Low noise level of 66 dB

1 x 12 V power outlet

two 230 V~ AC sockets

2 x 5 V DC/2.1 A (quick-charging) USB outputs

Anti-vibration rubber feet

SPECIFICATIONS – ENGINE	
Model	Single cylinder; 4 stroke petrol engine
Max. engine power	3.6 kW / 4.8 PS
Displacement	141 cm ³
Starting system	Pull cable starter
Tank capacity	6.3 L


LOGISTICAL DATA	
Net / gross weight	23.5 / 25.5 kg
Packaging dimensions	585 x 370 x 530 mm
Article number	5906230903
EAN	4046664195221
20 container	244 pcs
40 container	492 pcs
40 HQ container	615 pcs

SPECIFICATIONS – POWER GENERATOR	
Dimensions L x W x H	542 x 380 x 490 mm
Voltage control	Inverter
Nom. / Max. / Peak power	3000 / 3200 / 3500 W
Voltage output	230 V~
AC frequency	50 Hz
Overload protection	Yes
Low oil warning	Yes



SELF-SUFFICIENT ENERGY SUPPLY

SUITABLE FOR

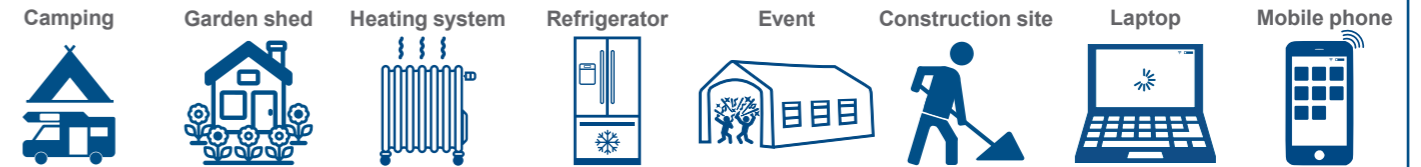

Fuel tank capacity: 6.3 L

Impact-resistant housing

Max. power 3200W
Peak power 3500W


141 cm³ 3.6 kW / 4.8 PS,
4-stroke petrol engine

User-friendly operation




PRODUCT DETAILS

2x USB connection



2 x 230 V power outlet
1 x 12 V power outlet



Oil warning indicator



Energy saving switch



Overload protection



Fuel-saving



Lightweight



Transportable



Voltage control system inverter:
Clean sine curve, suitable for
sensitive electrical devices.

SG3500i




Traditional manufacturers



Low noise level of 66 dB,
(31% quieter than conventional generators
with comparable power)

95 dB

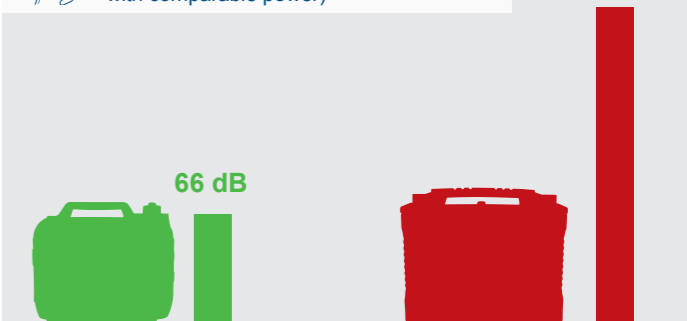

SG3500i

Traditional manufacturers